

GX Series



Industrial Pressure Transmitter

High Value Pressure Measurement Solution

Designed for performance/cost at single piece quantities

The GX Series Pressure Transducer is designed to provide our customers with an economical solution to their industrial pressure measurement needs. Key feature of the sensing element is its isolation from induced stresses such as mounting torque, thermal excursions, and vibration/shock. The GX is configurable (from single piece orders to large volumes) to meet Dylix's customers needs without sacrificing delivery or large increases in price.

Manufactured for extended life cycles

Dylix's engineers developed this product to last in high cyclical environments with or without the presence of water hammering or spiking. Advanced manufacturing techniques, extreme environmental burn-in and thorough residual stress relieving procedures ensure the GX Series maintains its performance over time.

NEMA 4X packaging

Every Dylix GX Series is rated to NEMA 4X standards regardless of the output (mVdc, Vdc or mAdc) or pressure format (gage, absolute or vacuum). Pressure ranges are available from 0-1 psig through 0-15,000 psig.

Dylix's Customer Service

Each transducer is delivered with a NIST traceable calibration certificate

Designed for high cycles



24" Wire Leads
NEMA 4X is Standard
(Option Code: B01)

Standard Features

- ±0.25% FSO Static Accuracy
- NEMA 4X Packaging
- ±0.25% FSO/YR stability

Available Options

- ±0.1% FSO Static Accuracy
- Alternate Wetted Materials
- Zero/Span Controls/ Shunt Cal

Shown with optional mini DIN 43650 C
(Option Code: B02)

Dylix Corporation
347 Lang Blvd.
Grand Island, NY 14072 USA

*Design & Manufacturer of
Pressure Instruments*

www.dylixcorp.com
P 716.773.2985
F 716.773.2786

GX Series Pressure Transmitter



0-1 through 0-15K psi

Industrial Pressure Transmitter

Product Specifications

Electrical

Excitation	
GX1	2-15 Vdc
GX2 & GX3	8-38 Vdc*
Output	
GX1	1-2 mV/V*
GX2	0-5 Vdc* (N/A for < 5 psi)
GX3	4-20 mAdc
Zero Balance	± 1% FSO
FSO Setting	± 1% FSO
Resolution	Infinite (± .001% FSO usable)
Response Time	
GX1	< 1 mS
GX2 & GX3	< 5 mS
Insulation Resistance	1,000 M Ω @ 50 Vdc
Reverse Polarity	Protected
Warm-up	< 10 mS
Power Supply Effect	± .002% FSO per V input (GX2, GX3)
EMI/RFI	Internal Filtering (GX2, GX3)
Short Circuit Protected	Up to 40 Vdc (GX2, GX3)

Mechanical

Pressure Ranges	0-1 through 0-15K psi (Customer may specify any range/eng. unit) (Absolute, Vacuum or Compound are available options)
Proof Pressure*	2X Full Scale*
Burst Pressure*	5X Full Scale*
Material	
Wetted Parts	316 & 17-4 SST*
Non-wetted Parts	316 SS plus electrical connector
Pressure Port	1/4" NPT (Male)*
Electrical Connector	NEMA 4X cable exit (24" cable)*
Dimensions	Per outline below
Weight	Nominal 10 oz.


Environmental

Compensated Temp Range	0 to 170° F
Operating Temp Range	-40 to 200° F
Storage Temp Range	-40 to 250° F

Performance

Static Accuracy	≤ ± 0.25% FSO* (BFSL, RSS) <i>(Combined effects of non-linearity, hysteresis & repeatability)</i>
Repeatability	≤ ± 0.05% FSO
Temperature Effects	≤ ± 1.5% FSO over comp range <i>(Combined effects of Zero & FSO with reference at 70° F)</i>
Long Term Stability	≤ ± 0.25% FSO per year

*Options Available

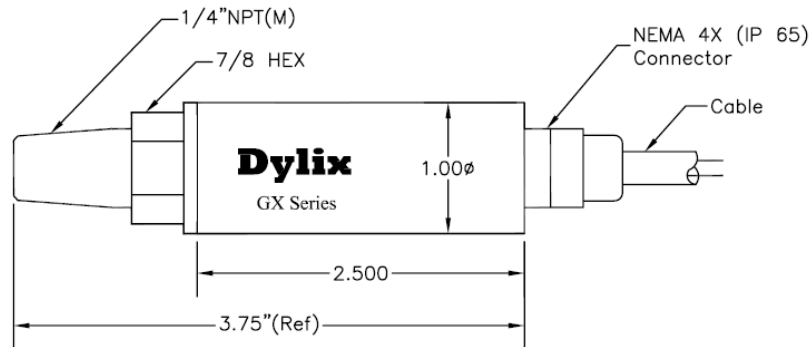

Standard Wiring:

Model	Output	+ Power	- Power	+ Signal	- Signal
GX1	mV/V dc 4 wire	Red/Pin 1/Pin A	Black/Pin 2/Pin B	Green/Pin 3/Pin C	White/Pin 4/Pin D
GX2	0-5 (10) Vdc 3 wire	Red/Pin 1/Pin A	Black/Pin 2/Pin B	Green/Pin 3/Pin C	
GX3	4-20 mAdc 2 wire	Red/Pin 1/Pin A		Black/Pin 2/Pin B	

Dylix Corporation reserves the right to change specifications without prior notification. Please contact the factory for the latest revision.

Data Sheet GX-07 Rev C